

DAYOU DSW3308G

L3 Gigabit Ethernet Switch



Overview

DAYOU NETWORKS DSW3308G is L3 Gigabit Ethernet Switch as a high-end interface to support a variety of multimedia services (IPTV TPS).

L3 switch has been developed to fit the needs of customers who wants to build a high-speed network environment, as the cost of the optimal 8port 10/100/1000Base-T interface, and to provide the service port, 100/1000Base-X interface and four uplink ports L3 aggregation switches to provide. Multicasting, QoS, Security, etc. Based on the outstanding performance is a system that provides a high-performance, high-quality, reliability.



DSW3308G

Flexible network configuration

Can respond flexibly, depending on the nature of the network by the customer's environment to meet than the specification of the service interface allows you to select various 10/100/1000Base-T 8port, 4port Uplink 1000Base-X port to provide services.

Improved performance

Non-blocking Switching fabric for high performance stable and 24Gbps switching capacity and up to speed packet processing 17.9Mpps support.

Network systems management

SNMP v1/v2, MIB II, RMON MIB, and applied to the remote network management can be more easily.

Security

That only authorized users with ACL (Access Control List) and administrator authentication protocol, RADIUS and TACACS +-related equipment to be able to access the system administration and network management of high security.

Key Features

L2 Features

- Port-based VLAN, IEEE 802.1q Tag VLAN
- VLAN stacking (Q-in-Q). VLAN Translation
- 802.1p packet priority
- Spanning Tree Protocol(STP/RSTP/MSTP)
- 802.3ad Link Aggregation
- Jumbo frame 9KB
- Self loop detection

L3 Features

- Static routing
- OSPF v2, BGPv4, RIPv2
- VRRP

Multicast

- IGMP v1/v2
- IGMP snooping/IGMP static join/IGMP proxy
- PIM-SM/SSM,
- Static/Dynamic RP, SPT (Shortest Path Tree)
- IP Multicast Routing ECMP

QoS

- Classification (L2/L3/L4)
- Mark/remark/policing
- Queue scheduling (SPQ, WRR, DRR)
- 8 queues per port
- Congestion management (RED)
- Traffic policing and shaping
- Rate limiting
- Traffic Control

Security

- Storm control (broadcast, multicast, DLF)
- CPU Protection (ACL, Rate Limit)
- DoS Protection
- NetBIOS, NetBEUI, NBT, CIFS, SSDP, WSDP filtering
- ARP/DHCP snooping , ARP Inspection
- 801.x Port-Based Authentication

Management

- CLI(serial / Telnet)
- Dual OS (active/backup) & Fail Over
- Remote OS upgrade (FTP/ TFTP)
- Multiple configuration files
- Remote configuration upgrade (FTP/TFTP)
- Port/Protocol mirroring
- SNMP v1/v2
- RMON history/Syslog/Telnet/SSH
- DHCP server, relay agent with option82
- DDM (Digital Diagnostics Monitoring)
- LLDP (Link layer Discovery Protocol)
- AAA (Authentication, Authorization, and Accounting)
- NTP/TCP dump & logging

IPv6

- Dual stack (IPv4/IPv6)
- Core stack
 - IPv6 Specification/ICMPv6
 - Neighbor Discovery for IPv6
 - IPv6 Stateless Address Auto-configuration
- DHCPv6 (server/relay/snooping)
- MLD v1/v2, MLD snooping, MLD proxy, PIM-SM for IPv6
- OSPFv3, BGP4+, Static routing
- QoS and security for IPv6
- Management for IPv6

DAYOU NETWORKS SWITCH SERIES

Specifications

Memory

- RAM 256Mbyte
- FLASH 128Mbyte

Interface

- Downlink 8port 10/100/1000Base-TX
- Uplink 4ports 100/1000Base-X(SFP)
- Console RS-232C(RJ-45)

Performance

- 24Gbps switching fabric, 17.9Mpps throughput
- 16K MAC address, 4K 802.1Q VLAN
- 4K L3 table(IPv4), 2K L3 table(IPv6)
- 8K LPM(IPv4), 4K LPM(IPv6)
- 1K multicast(L2)
- 1K multicast(L3/IPv4), 256B multicast(L3/IPv6)

Power


- Operating Power AC88V~264/ VAC47~63Hz Free Voltage
- Power Consumption 7Watts
- Operating Temperature 0°C ~50°C
- Operating Humidity 10 ~ 90%(Non-condensing)

Dimensions

- Dimension(W/H/D) 440mm x 45mm x 250mm
- Weight 2.5Kg

Warranty

- One-year(12month) return to factory parts

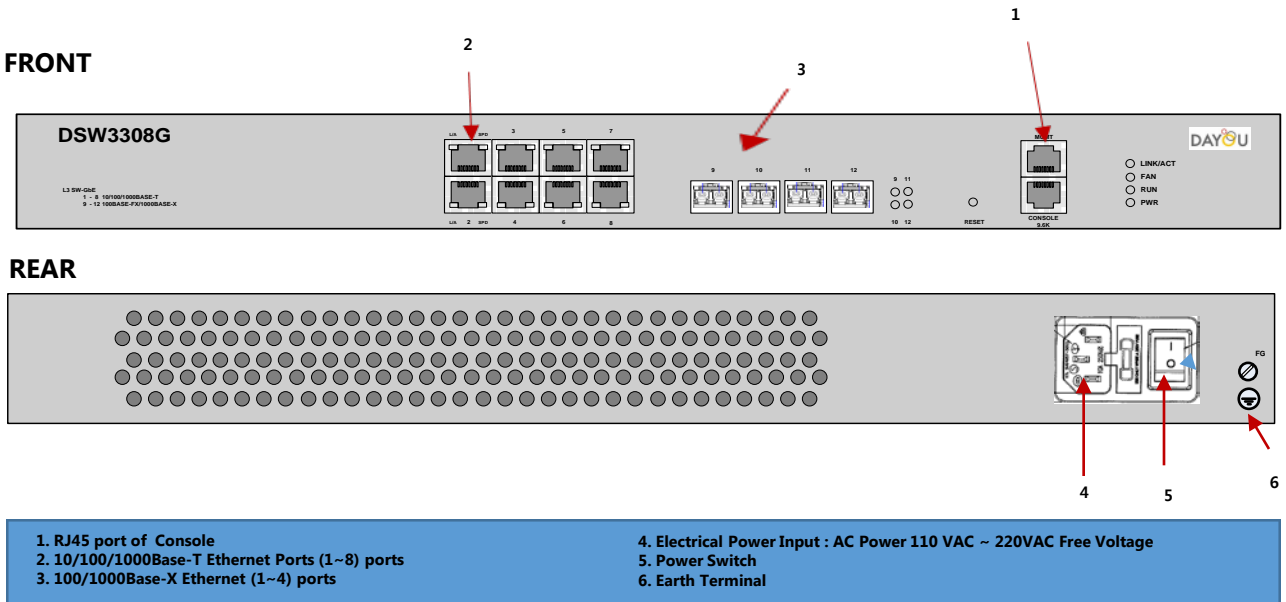

Ordering Information

Contact Information

Website: <http://www.dayounetworks.com>
 E-mail : sales@dayounetworks.com

DAYOU NETWORKS

4F, 500-2, Sangdaewon-dong, Junwon-gu, Seognam-si,
 Gyeonggi-do, Korea (462-120)
 Tel : +82-31-737-7000 / FAX:+82-31-737-7100